




DELTA SCREW FLANGE 1"

A concealed fastener metal panel system featuring 1" high ribs. The valley between the ribs can either come as a flat, 2 bead surface, or with slightly raised intermediary ribs running the length of the panel. Recommended for roofing applications only

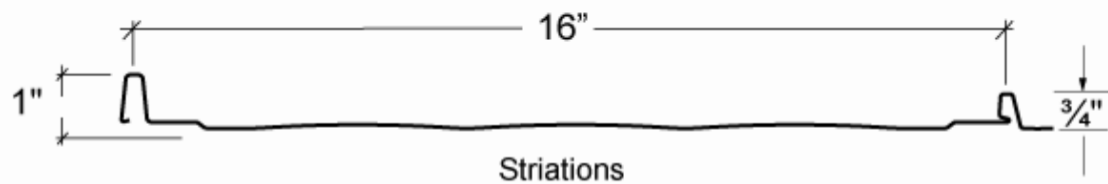


**26 Gauge &
24 Gauge**

**Recommended
2:12 Pitch & Above**

**1' Rib
Height**

- Siphon Groove to minimize leaks and to direct water down the panel
- Hidden fastening system for a sleek modern look
- Unique lap groove that hides the overlap providing a smooth, clean appearance
- Striations provide a great way to counter oil canning

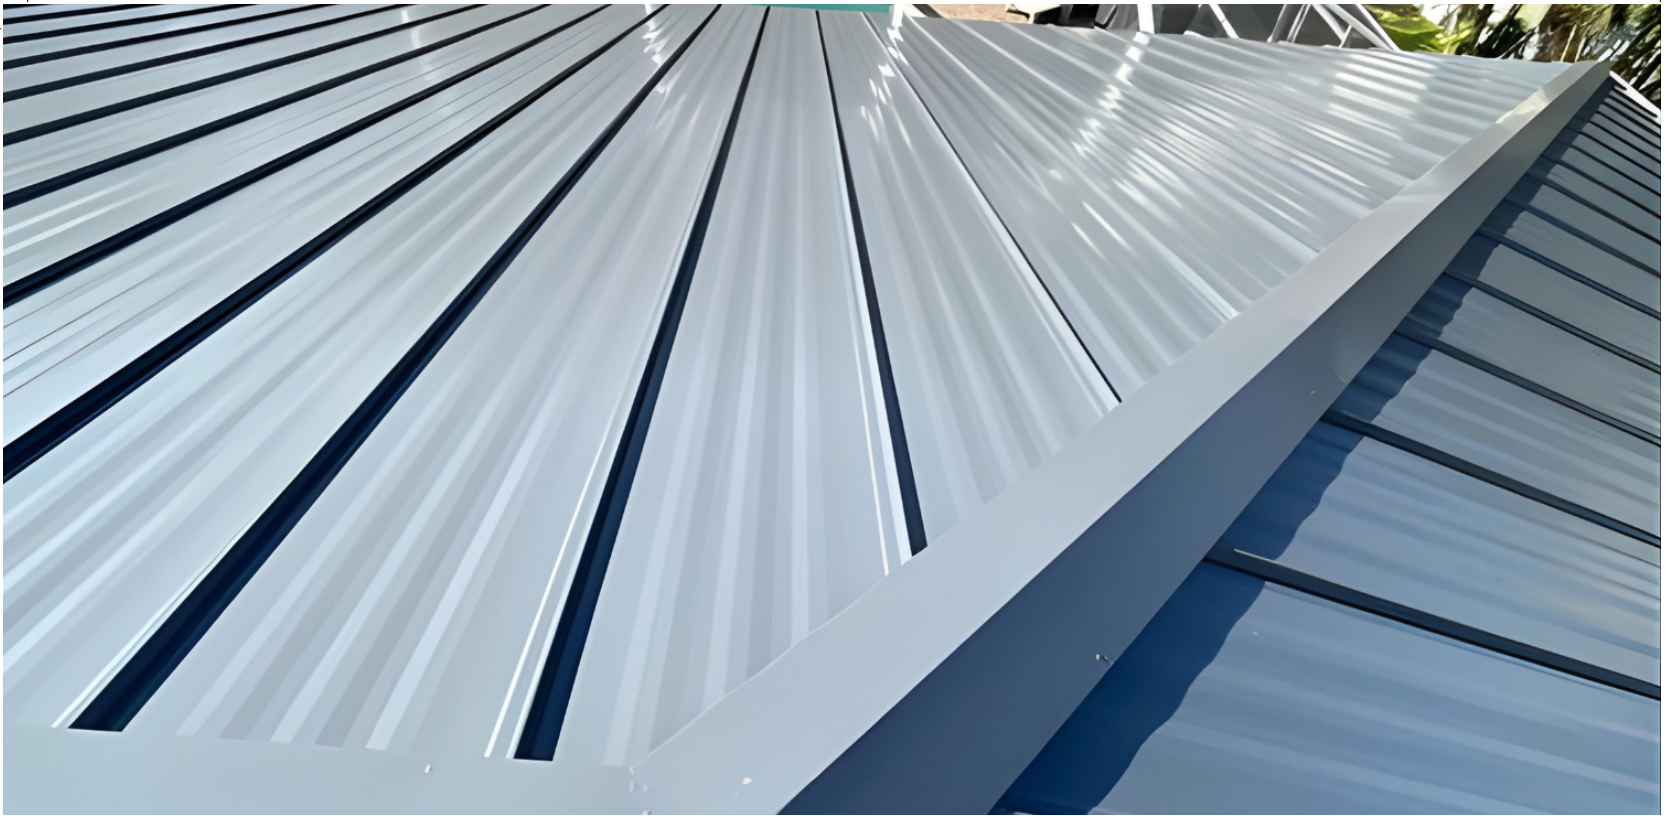

Fastener Application:

Screws are recommended to be placed center of slotted hole
1" pancake screws are recommended as a fastener into a solid
substrate.

Note: Add 1" to the length of the roof deck for crimping over the
eave.

Striations are recommended.

For panel runs over 26' contact our support staff.



SHERWIN-WILLIAMS.
Coil Coatings



This product has a UL 790 fire rating or CWRC

*The technical information presented is intended for assessment by individuals with technical expertise and is of a theoretical nature. Any utilization of this information is at the independent discretion and risk of the user. Delta Metals disclaims any responsibility or liability for outcomes or damages arising from the improper evaluation or use of Delta Screw Flange 1".

FOR MORE INFORMATION GO TO WWW.WEST.DELTAMETALS.COM