



FLUSH MOUNT WALL PANEL

A versatile panel that can be used for interior or exterior applications. Primarily used for siding, the Flush Mount Wall Panel can also be used for ceilings, fascia, and soffits. Our standard panel comes with no reveal between panel side lap, but 1”, 2”, & 3” reveals can be requested. When used in a soffit application this product may be perforated upon request.

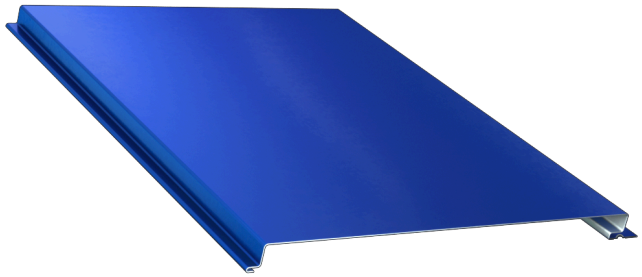

Solid (For Wall OR Soffit Application)

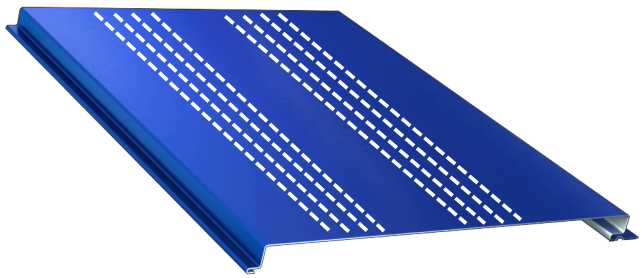

Vented (For Soffit Application Only)




Panel Specifications:

Available Gauges:	**26 & 24 Gauge**
Steel thickness:	**26ga. - .0185"** **24 ga. - .0239"**
Paint System:	SHERWIN-WILLIAMS Coil Coatings SMP/Kynar WeatherXL
Warranty:	**40 Year Lifetime Limited Paint Adhesion.** **30 Year Chalk and Fade**
Substrate:	**AZ50 Minimum**
Perforation:	**1/16" Deep** ****(Soffit application only)****

Panel Highlights:

- Overall Coverage: 16.5” 24g, 26g, Standard (Also Available, 12” 24g)
- Panel Face Sizes: 13.5” (3” Reveal), 14.5” (2” Reveal), 15.5” (1” Reveal)
- Rib Height: 1"
- Panel Length: 1’-26’ Crate-able, 26’-45’ Onsite Roll Off
- Installation: Installation over a solid substrate (Vertical or Horizontal) using Pancake Head screws of similar
- Fastener Type: Concealed
- Applications: Residential Commercial, Agricultural, Interior

Panel Dimensions:

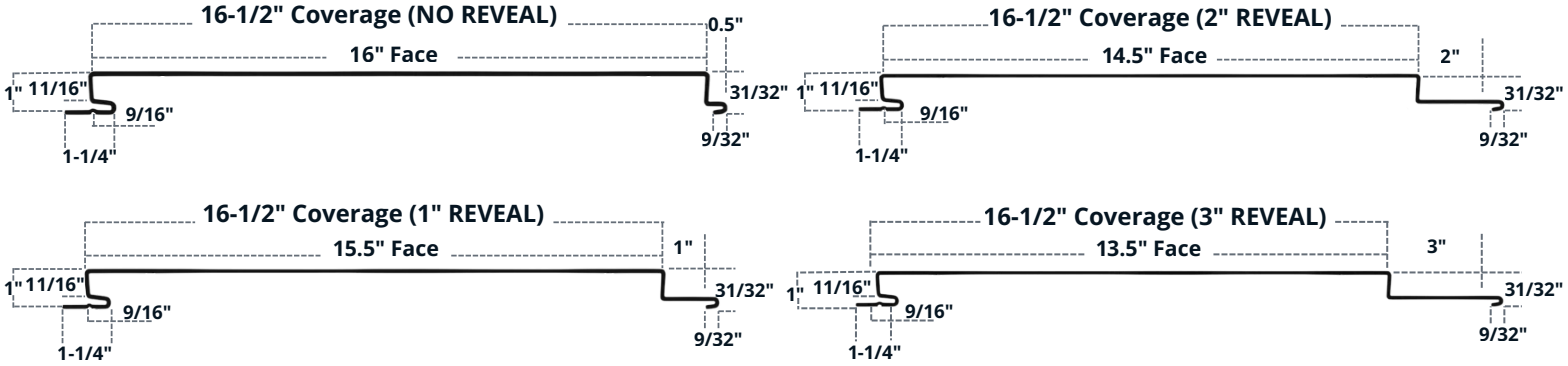

The technical information presented is intended for assessment by individuals with technical expertise and is of a theoretical nature. Any utilization of this information is at the independent discretion and risk of the user. Delta Metals disclaims any responsibility or liability for outcomes or damages arising from the improper evaluation or use of Flat Wall Panel.

For SDI manual and more information visit
WEST.DELTAMETALS.COM